

Suitable wastewater pumps:



Large free passage for heavily contaminated wastewater containing coarse matter with particle sizes up to 50 mm, as well as solids and fibres.

US 75 ES + US 105 ES | H max 12 m, Q max 28 m³/h



For wastewater containing solids up to 10 mm in size, e.g. from groundwater collection pits and domestic appliances such as washing machines and dishwashers.

US 62 ES + US 102 ES | H max 13 m, Q max 28 m³/h



For heavily contaminated wastewater containing solids up to 30 mm in size (excluding stones), for fibrous waste water from laundries, communal washing facilities and domestic appliances (washing machines and dishwashers).

US 73 ES + US 103 ES | H max 13 m, Q max 28 m³/h

Accessories:

Article	Material no.
Reducing sleeve 2 x 1 1/2"	JP48069
Check valve brass, DN 50, PN 16, 2"	JP44787
Chain tested, rated for 320 kg, length 2.5 m	JP45901
Chain tested, rated for 320 kg, length 5 m	JP45902
Chain tested, rated for 320 kg, length 7.5 m	JP47365
Carrying strap with shackle	JP45168
9 V battery , for mains-independent alarm	JP44850
Screen foot 10 mm free passage	JP45957

For high-performance
wastewater pumps




SHAFT INSTALLATION KITS

Easyfix 50 Single
Easyfix 50 Duo



Scope of supply: | Dimensions:

- Guide rail system on base plate
- Pressure pipe with non-return valve (fully pre-assembled)
- Guide rail claw
- Elastic connection
- Clamps

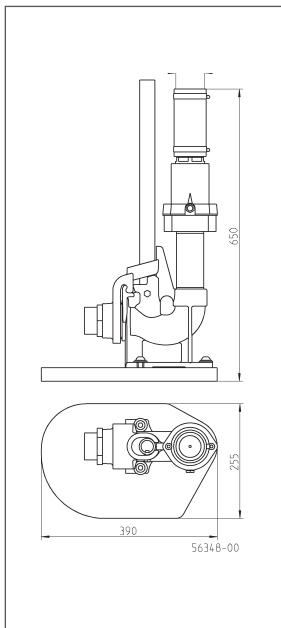

Material no.	Weight kg	Shaft dimensions mm
JP51001	11	min. 600 x 300

Quick in. Quick out. Job done!

Pumps installed in shafts must be installed, maintained and serviced throughout their service life. The Easyfix 50 installation kits make all these tasks easier. With minimal effort, the pumps can be lowered into the shaft and pulled out again using the kits.

- **Easyfix 50 Single for single systems;**
- Easyfix 50 Duo for double systems**
- Quick and easy installation
- Ready to plug
- Guide rail pre-mounted on base plate
- **Easyfix Duo incl. control unit**

The Easyfix 50 installation kits are available for powerful dirty water pumps in our US 62 ES - US 105 ES series. They can be installed in shafts both inside and outside buildings. All necessary components are pre-assembled on a base plate, ready for connection to the pressure pipe.




INSTALLATION MADE EASY



Scope of supply: | Dimensions:

- 2 x Guide rail system on base plate
- Pressure pipe with non-return valve (fully pre-assembled)
- Guide rail claws
- Elastic connection
- Clamps
- **Ready to plug**
- EasyLogo control unit,** 1.5 m cable (incl. level sensor with 10 m connection cable), regulates alternating operation of the pumps, ensures alarm messages and peak operation

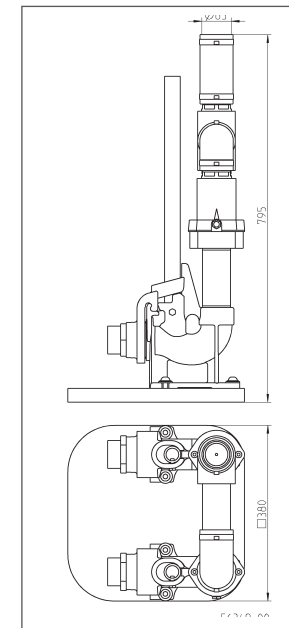

Material no.	Weight kg	Shaft dimensions mm
JP51000	23	min. 600 x 600