

The Floodbox

CONNECTED IN THREE STEPS ONLY:



Connect hose



Switch on



Pump



Einfach genial! You can watch the flood box in action on YouTube. www.youtube.com/watch?v=H17vvpJaUlo



JUNG PUMPEN GmbH | 33803 Steinhagen | Germany | Phon +49 5204 170 | info@jung-pumpen.de | www.jung-pumpen.de

PENTAIR and PENTAIR JUNG PUMPEN are trademarks, or registered trademarks of Pentair or its subsidiaries in the United States and/or other countries.
© 2026 Pentair Jung Pumpen

Floodbox

THE FLOOD EMERGENCY KIT





Floodbox

SAVE WHAT CAN BE SAVED!

Climate change is showing its consequences. We are increasingly experiencing dangerous heavy rainfall that floods streets and buildings.

With the „**Flood Box**“ First Aid Kit, you can quickly and reliably pump dirty water out of flooded cellars. Simply place the pump together with the carrying cage on the cellar floor and pump the wastewater out via the fire hose

The flood box pumps up to a residual water level of 35 mm with the float locked. Solids, like leaves, gravel, or similar, are kept away from the pump by the carrying cage.

However, you can also use the heart of the flood box, the powerful U5KS submersible drainage pump, independently of the carrying cage in stationary or mobile areas in the house and garden.


If you remove the foot strainer of the pump, residual water can be reduced to a few millimetres by the built-in flat suction.



THE THREE COMPONENTS:

U5KS	Fire hose	Carrying cage
- High delivery head (Hmax 8 m, Qmax 11,5 m³/h) 20 mm free passage in the pump hydraulics ensure maximum operational safety - Motor jacket cooling and thermal protection ensure trouble-free continuous operation even when the pump is submerged - Float lock to achieve minimum residual water levels - Cable length 10 m 	- Length 12,5 m - Quick, easy connection with C-coupling - Durable, long-lasting material - Space-saving storage when rolled up condition - Can be extended with standard C-coupling 	- Integrated pump fixation (for safe pump position) - Protection against settling of deposits - Wall mounting for storage the flood box 

THE TRIPLE PLUS:

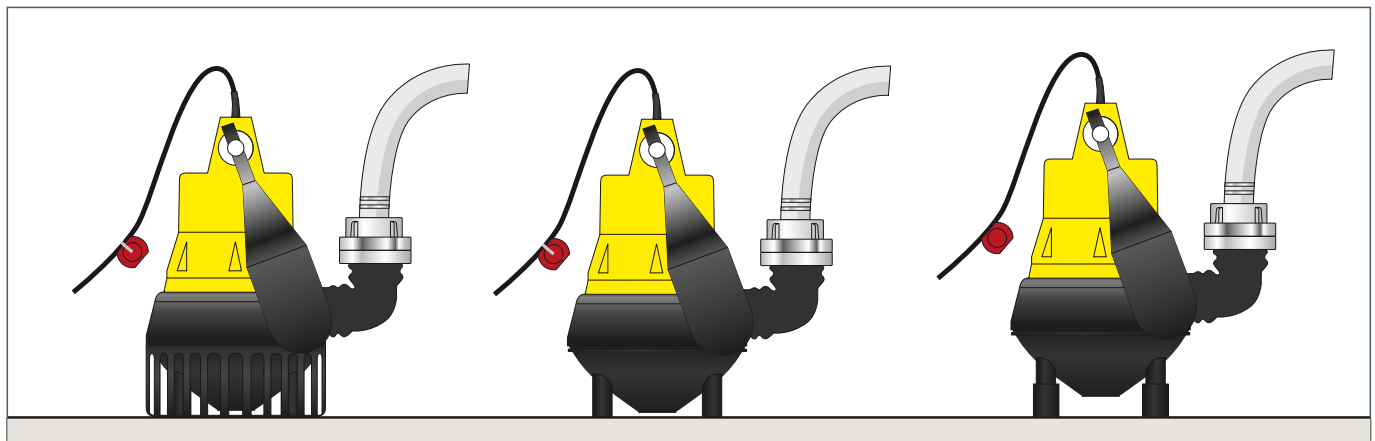

Without carrying cage

Naturally the U5KS can be used without the carrying cage. To do this detach the metal clip on the pump handle and remove the pump.

Flat suction

The foot strainer of the pump can be removed. The pump can now pump down to a minimum of residual water..

For large solids

If you want to use the entire free passage of the U5KS of 20 mm, remove the foot strainer and push the enclosed extensions onto the pedestals.