

US 73 + 103 HE(S)

**SUBMERSIBLE DRAINAGE PUMPS  
FOR HOT WATER OPERATIONS**






## Where it gets hot...

- For stationary use in laundries or communal washing facilities, for commercial dishwashers and washing machines or for the emergency overflow of a heating system.
- For heavily contaminated water with soiling up to 30 mm particle size.
- For hot water operations up to 194 F (90 °C).



## ... play it safe!

- Absolutely safe to run dry.
- Particularly durable due to SiC mechanical seal independent of sense of rotation and controllable oil chamber.
- In stationary use: The use of a guide rail system (accessory) reduces the risk of injury from incoming hot water.
- Attention! Not suitable for pumping waste water from lavatories and urinals!

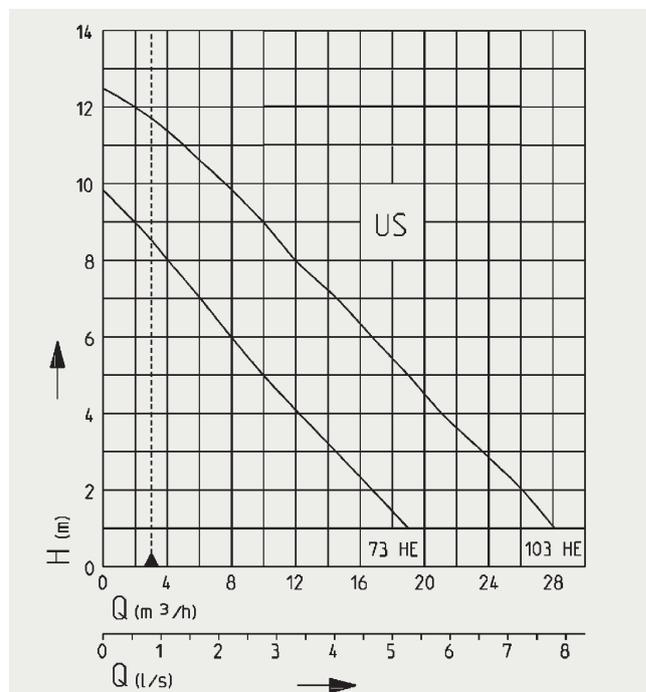

Type	US 73 HE/HES	US 103 HE/HES
H max	9,5 m	12,5 m
Q max	19 m³/h	28 m³/h
Voltage	1/N/PE~230 V	1/N/PE~230 V
P1	0,83 kW	1,37 kW
P2	0,50 kW	0,98 kW
Current	3,9 A	6,0 A
Motor protection	integrated	integrated
Plug	Safety	Safety



JUNG PUMPEN GmbH | 33803 Steinhagen | Germany | Phone +49 5204 170 | [info@jung-pumpen.de](mailto:info@jung-pumpen.de) | [www.jung-pumpen.com](http://www.jung-pumpen.com)

PENTAIR and PENTAIR JUNG PUMPEN are trademarks, or registered trademarks of Pentair or its subsidiaries in the United States and/or other countries.  
© 2023 Pentair Jung Pumpen