

## SKS 800

POLY-SUMPS FOR DRAINAGE WATER

- Mark of conformity
- Single- or duplex units suitable for traffic to class B 125
- Easy to install
- Smooth benched deposit free
- Valves can be operated from above
- Single unit retrofittable as duplex unit



### DESCRIPTION

The buoyancy proof sumps are supplied for the house and estate drainage. They can be equipped with one or two pumps.

The sumps are suitable for accessible areas (class A 15) or for traffic areas (class B 125).

Preformed transport handles provide easy transport and placing into its final position.

Wastewater and drainage water can vary widely. Therefore we have a range of different pumps to suit the various grades of impurities.

Buoyancy-proof plastic sump of high grade polyethylene approved by the German Institute for Construction Engineering (DIBt), with socket for inlet and venting, prefabricated discharge connection DN 32 (1¼") or DN 50 (2") and ball valve.

For a comfortable installation of the pumps and for an easy pump removal the sump is equipped with an guide rail system. Depending on the sump version the proven guide rail system GR 32 or GR 50 can be used.

Depending on the used extension it is possible to extend the sump to a total height of 2.75 metres. The required type of loading class depends on the site.

The installation depth with a concrete ring cl. A 15 is 1.70 m. The total volume is 740 litres. The storage volume up to the lower edge of the inlet is 190 litres and the residual volume is 90 litres.

# SKS 800

## POLY-SUMPS FOR DRAINAGE WATER

### SCOPE OF SUPPLY

#### SKS 800 (Single unit)

Plastic sump, assembled with guide rail system DN 32 or DN 50, PP-pipe, vertically closing swing-type check valve, ball valve, stainless steel delivery piping with 1¼ or 2" external thread, 1 sleeve DN 150 (KG-pipe) for the inlet, 3 ports for connecting DN 100 for cable and venting (KG-pipe).

#### SKS 800 (Duplex unit)

Plastic sump, assembled with 2 guide rail systems DN 32 or DN 50, PP-pipe, 2 vertically closing swing-type check valves, ball valve, stainless steel delivery piping with 1¼ or 2" external thread, 1 sleeve DN 150 (KG-pipe) for the inlet, 3 ports for connecting DN 100 for cable and venting (KG-pipe)

### SKS 800

Type	Code No.	Weight
SKS-B 800-32	<b>JP47346</b>	84 kg
SKS-B 800-D32	<b>JP47347</b>	85 kg
SKS-B 800-50	<b>JP47348</b>	95 kg
SKS-B 800-D50	<b>JP47349</b>	109 kg



### POSSIBLE PUMPS

SKS-B 800-32	US 151 ES/DS	US 152 E/D
U3KS	US 251 DS	US 151 E
U5KS	US 73 ES/DS	US 152 D
U6K ES/DS	US 103 ES/DS	US 251 D
SKS-B 800-D32	US 153 ES/DS	US 73 E/D
U3K	US 253 DS	US 103 E/D
U5K	US 75 ES/DS	US 153 E/D
U6K E/D	US 105 ES/DS	US 253 D
SKS-B 800-50	US 155 ES/DS	US 75 E/D
US 62 ES/DS	SKS-B 800-D50	US 105 E/D
US 102 ES/DS	US 62 E/D	US 155 E/D
US 152 ES/DS	US 102 E/D	

# SKS 800

POLY-SUMPS FOR DRAINAGE WATER

SKS-B 800-32/SKS-B 800-D32/SKS-B 800-50/SKS-B 800-D50

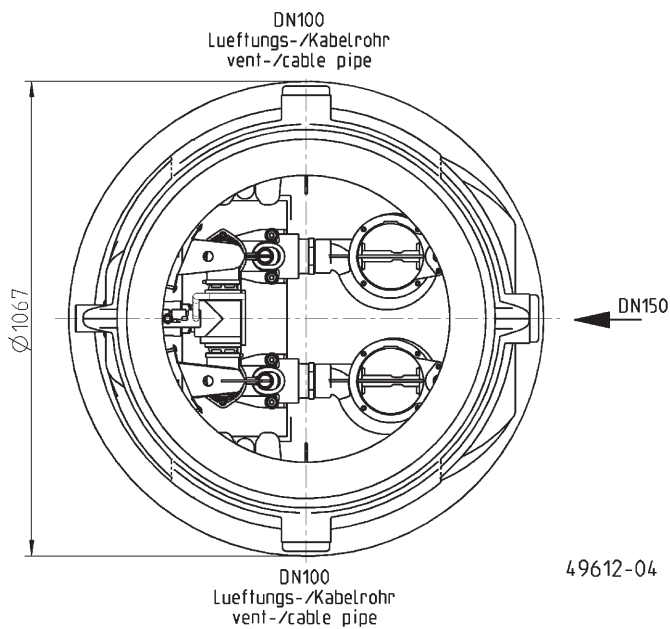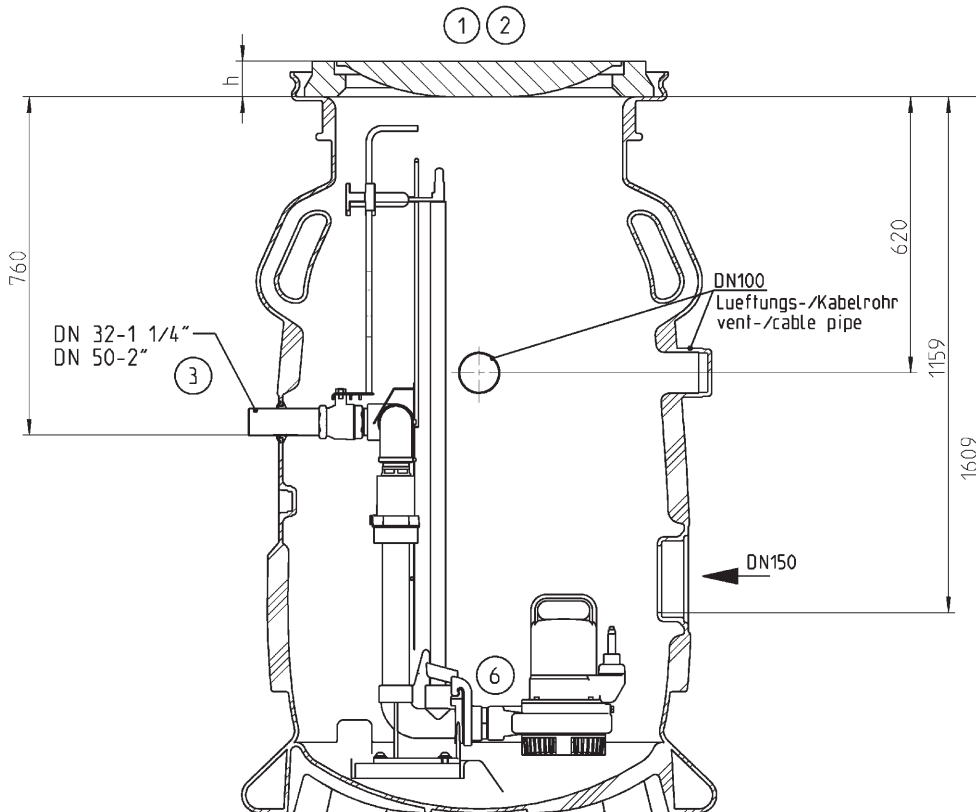

# SKS 800



## POLY-SUMPS FOR DRAINAGE WATER

### Dimensions sump extensions

#### Single- and duplex units SKS-B 800

Dimensions (without cover) mm	Height	Inlet	Pressure outlet	Buoyancy proof depth
Sump	1609	1159	761	1609
<b>Class A</b>				
Sump + 1 x PSV-A/B 375	1984	1534	1136	1984
Sump + 1 x PSV-A 855	2464	2014	1616	2464
Sump + 1 x PSV-A 1335	2944	2494	2096	2944
<b>Class B</b>				
Sump + 1 x PSV-A/B 375	1984	1534	1136	1984
Sump + 2 x PSV-A/B 375	2369	1919	1531	2369
Sump + 3 x PSV-A/B 375	2749	2299	1901	2749



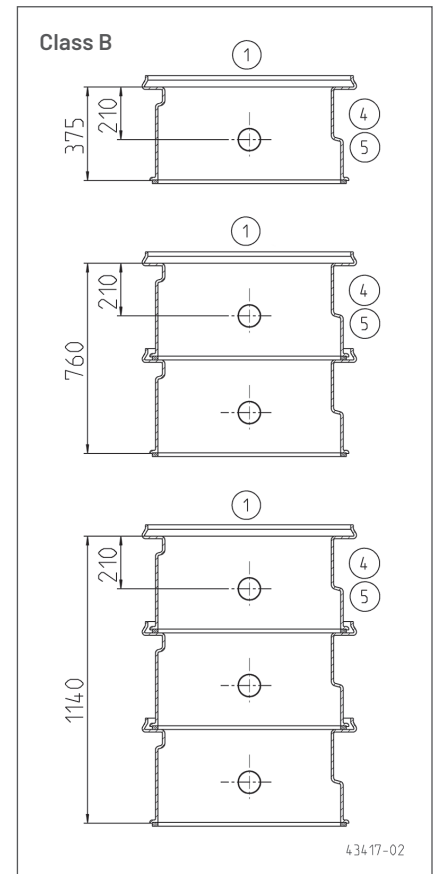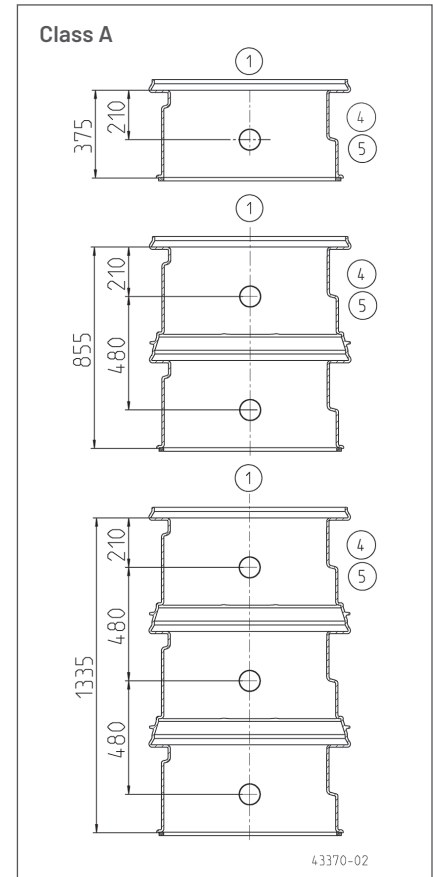




Volume	Sump	Extension	Switching point			
			PSV	Off	On	Alarm / peak load
SKS-B 800	740 l	159 l	90 l	135 l	170 l / 190 l	190 l



# SKS 800

POLY-SUMPS FOR DRAINAGE WATER

## SUMP ACCESSORIES

				Code No.	
	<b>① Concrete cover</b>				
	Cover cl. A	Ø 600, h=80, D 785	90 kg	JP46437	
	Cover cl. B	Ø 610, h=125, D 750	110 kg	JP44972	
	<b>Lifting device</b>	for cl. A		JP44969	
	<b>② Concrete ring (max. 1)</b>	only cl. A, 625 x 100 mm, Ø 785	o. Ver- längerung	32 kg	JP44975
	<b>③ Screwed joint</b>				
	1 1/4" to Ø 40 mm (DN 32)			JP44796	
	1 1/4" to Ø 50 mm (DN 40)			JP44797	
	1 1/4" to Ø 63 mm (DN 50)			JP44798	
	2" to Ø 63 mm (DN 50)			JP45950	
	<b>④ Sump extension</b>	PSV-A/B 375	25 kg	JP46429	
		PSV-A 855	40 kg	JP46430	
		PSV-A 1335	54 kg	JP46431	
	<b>Guide rail extension</b>	SKS-32	for single units	JP48067	
		SKS-50	for single units	JP48065	
		SKS-D32	for duplex units	JP48068	
		SKS-D50	for duplex units	JP48066	
	<b>⑤ Operating handle T-Key</b>	for extension, stainless steel, with 1.5 m chain		JP46438	
	<b>⑥ Reducing socket</b>	1 1/2"-2" for mounting pumps with 1 1/2" discharge		JP48069	
	<b>⑦ Ventilation pipe</b>	DN 100 stainless steel, , 700 mm		JP44858	
	<b>⑧ Chain</b>	certified, 2.5 m, 320 kg, 5 rings (EN 818 mod.)		JP45901	
		certified, 5.0 m, 320 kg, 8 rings (EN 818 mod.)		JP45902	
	<b>Webbing</b>	with shackle		JP45168	
	<b>⑨ Securing levers</b>	for US 75, US 105, US 155, stainless steel		JP41024	