

## MULTIDRAIN UV 600

### SUBMERSIBLE DRAINAGE PUMPS

- High-quality stainless steel design
- 10 mm free passage
- Discharge 2" (horizontal and vertical)
- Automatic self-ventilation
- Emerged operation due to motor jacket cooling (S1)
- Thermal motor protection
- Duplex mechanical seal
- Replaceable moisture sealed cable inlet
- Easy to maintain due to guide rail system



#### DESCRIPTION

The submersible drainage pumps Multidrain UV 600 have been developed for drainage applications where high delivery heads are required.

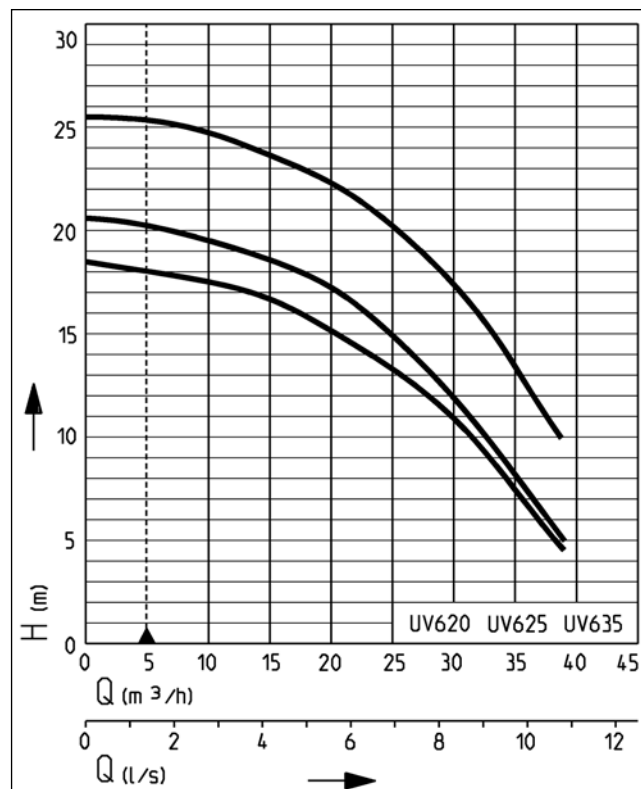
All kind of drainage / greywater with solids up to 10 mm can be disposed from large depths. Shopping centers, high-rise buildings, undergrounds stations and other buildings with deep basements are the right environment for the UV 600 pumps.

In addition to a fix sump installation these pumps can also be used for mobile applications.

The pressure pipe can be connected either to the vertical or the horizontal discharge.

The horizontal one is suitable for sump installations with a guide rail system (GR 50). For mobile applications or in narrow sumps the connection to the vertical discharge port is recommended.

#### PERFORMANCE



Type	Delivery head H [m]	6	8	10	12	14	16	18	20	22	24
UV 620-1	Flow rate Q [m³/h]	36	33	30	27	22	16				
UV 620-3		37	34	32	28	24	18	5			
UV 625-3		38	36	33	31	27	23	18	5		
UV 635-3				39	37	34	32	28	25	20	14

Specifications can be changed without notice. Performance subject to ISO 9906 tolerances.

The minimum flow velocity in the pressure piping must be 0.7 m/s according to EN 12056. This data is represented in the performance curve as a limit of application.

# MULTIDRAIN UV 600

## SUBMERSIBLE DRAINAGE PUMPS

### SCOPE OF SUPPLY

Pump with 10 m cable, automatic version with integrated ball-float switch, plug 2" with automatic ventilation for the outlet not in use.

Special technical note for UV 620-1 / UV 620-1 S:

Due to the high starting current, the approval of the responsible power supplier should be obtained before commissioning these two pump types.

### MECHANICAL DATA

Pump	Vertical single-stage	Oil chamber	Yes
Free passage	10 mm	Seal on medium side	SiC mechanical seal
Bearing	Ball bearings, grease-lubricated	Run dry protection	Yes
Seal on motor side	Mechanical seal	Submersible	Yes
		Pressure outlet	IG 2"

### ELECTRICAL DATA

Power line	10m H07RN8-F	Insulation class	F
Type of enclosure	IP 68	Winding thermostat	Yes

### MULTIDRAIN UV 600

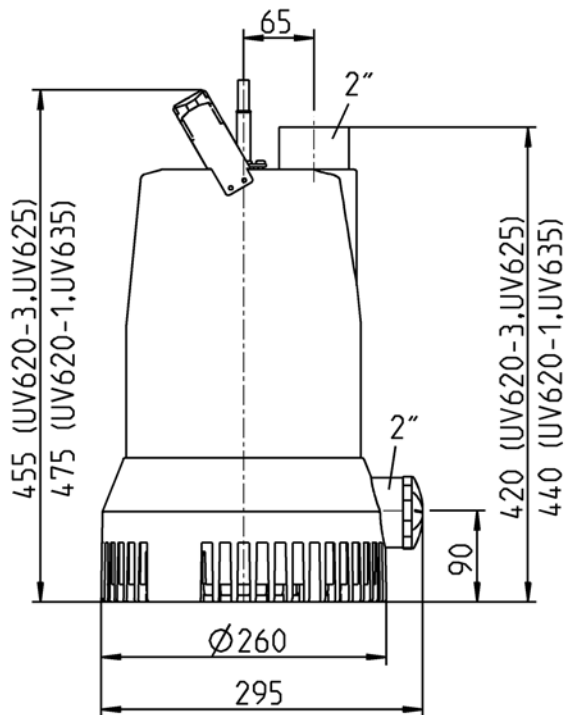
Type	Code No.	Voltage	Motor rating		Current	Wires	Motor protection	Plug	Weight
			P1	P2					
<b>Without level control</b>									
UV 620-1	<b>JP47337</b>	1/N/PE~230 V	2.40 kW	1.65 kW	10.4 A	3G1,5	Integrated	Without	23.0 kg
UV 620-3	<b>JP47339</b>	3/PE~400 V	2.38 kW	1.95 kW	4.6 A	4G1,0	on request <sup>1</sup>	Without	23.0 kg
UV 625-3	<b>JP47341</b>	3/PE~400 V	2.80 kW	2.28 kW	5.2 A	4G1,0	on request <sup>1</sup>	Without	23.0 kg
UV 635-3	<b>JP47343</b>	3/PE~400 V	3.70 kW	3.05 kW	6.2 A	4G1,0	on request <sup>1</sup>	Without	25.5 kg
<b>With built-in level control</b>									
UV 620-1 S	<b>JP47338</b>	1/N/PE~230 V	2.40 kW	1.65 kW	10.4 A	3G1,5	Integrated	Safety	23.5 kg
UV 620-3 S	<b>JP47340</b>	3/PE~400 V	2.38 kW	1.95 kW	4.6 A	4G1,0	on request <sup>1</sup>	Without	23.5 kg
UV 625-3 S	<b>JP47342</b>	3/PE~400 V	2.80 kW	2.28 kW	5.2 A	4G1,0	on request <sup>1</sup>	Without	23.5 kg
UV 635-3 S	<b>JP47344</b>	3/PE~400 V	3.70 kW	3.05 kW	6.2 A	4G1,0	on request <sup>1</sup>	Without	26.0 kg

<sup>1</sup>Protective motor plug necessary see accessory

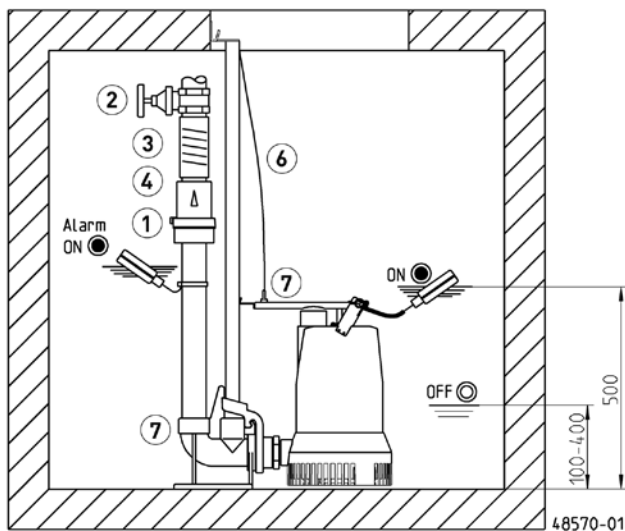
# MULTIDRAIN UV 600

## SUBMERSIBLE DRAINAGE PUMPS

### Dimensions UV 600 (mm)



### Example of single unit installation with GR

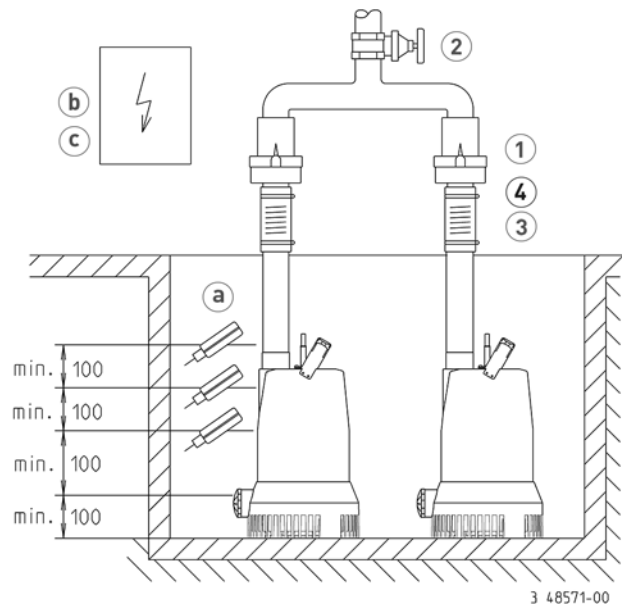


Single unit 2" with GR 50: sump area min. 40x70 cm  
Single unit 2" without GR: sump area min. 40x50 cm

Duplex unit 2" with GR 50: sump area min. 70x70 cm  
Duplex unit 2" without GR: sump area min. 50x70 cm

In case of installation beneath the backpressure level the pressure tube must be taken in a

### Example of duplex unit installation



loop over the local backup level acc. to EN 12056. Besides, it must be secured with an EN 12050-4-proofed swing-type check valve. Additionally we recommend an alarm system.










In accordance with EN 12056-4 section 5.1, it has a built-in automatic spare pump or a double attachment included, which ensures that sewage drainage is not interrupted.

Suspend control unit in a dry room


# MULTIDRAIN UV 600

## SUBMERSIBLE DRAINAGE PUMPS

### MECHANICAL ACCESSORY

				Code No.
	<b>① Swing-type check valve</b>			
	R50 EN 12050-4	2" (DN 50), PN 4	150x120 (HxB)	JP00326
	<b>Ball-type check valve</b>			
	K50 EN 12050-4	2" (DN 50), PN 6	185x155 (HxB)	JP44782
	<b>② Stop valve</b>	brass, 2" (DN 50), PN 16	140x70 (HxB)	JP44787
	<b>③ Elastic connection</b>	2" (DN 50), PN 4	150x63 (HxD)	JP44775
	<b>④ Hose band clamp</b>	2"		JP44764
	<b>⑤ Hose coupling</b>			
	Coupling Storz C	2" male thread		JP50217
	Coupling wrench			JP25708
	<b>Pressure hose</b>	12,5 m, synthetic, with coupling Storz C, Ø 38 mm		JP50298
		15 m, synthetic, with coupling Storz C, Ø 52 mm		JP00336
	<b>⑥ Chain</b>	certified, 2.5 m, 320 kg, 5 rings (EN 818 mod.)		JP45901
		certified, 5.0 m, 320 kg, 8 rings (EN 818 mod.)		JP45902
		certified, 7.5 m, 320 kg, 11 rings (EN 818 mod.)		JP47365
		Shackle, certified, 630 kg, stainless steel		JP45904
	<b>⑦ Guide rail system</b>			
	GR 50			JP25593
	Securing lever	UV 600		JP49171
	Guide rail 1"	1500 mm		JP48937
	Guide rail 1"	2000 mm		JP48938
	Guide rail 1"	2500 mm		JP48939
	Guide rail 1"	3000 mm		JP48940


### ELECTRICAL ACCESSORY

			Code No.
	<b>a Alarm unit</b>		
	AG10	subm. ball contact switch, mains dependent, potential-free contact, 9.5 m cable	JP44892

# MULTIDRAIN UV 600

## SUBMERSIBLE DRAINAGE PUMPS

### ELECTRICAL ACCESSORY

			Code No.
	b	<b>Control for single units</b>	
		Control unit 1-46	JP47990
		Control unit AD 46	JP14353
		Control unit HIGHLOGO 1-610	JP47991
		Control unit AD 610	JP14354
		<b>Control for duplex units</b>	
		Control unit HIGHLOGO 2-46 400 V	JP47999
		Control unit BD 46 400 V, for pumps US 251-253, UV 620-3, UV 625-3	JP45739
		Control unit HIGHLOGO 2-610 400 V	JP48000
		Control unit BD 610 400 V, for pumps UV 635-3	JP45741
		<b>Level control</b>	
		Subm. switch pack AmG 2 subm. ball contact switch with 9.5 m and counterweight	JP16719
		Subm. switch pack BmG 3 subm. ball contact switch with 9.5 m and counterweight	JP16726
		Weight to stabilize the subm. ball contact switch	JP44803
		<b>Protective motor plug</b>	
		CEE motor protection 4.5-6.3 A 400 V with level control	JP09726
		CEE motor protection 2.5-4.0 A 400 V, mandatory for pumps with integrated motor protection	JP44754
		CEE motor protection 4.5-6.3 A 400 V, mandatory for pumps without integrated motor protection	JP44751
	c	<b>Rechargeable battery</b> 9 V, for mains independent alarm	JP44850